

Concealed Air Terminal Assembly

1532

12" Nickel-plated bronze point, with 3/8" x 12" solid copper stem and bronze mechanical cable connector.

WT 15.9 oz (450.8 g)

1538

12" Nickel-plated bronze point with 3/8" x 18" solid copper stem and bronze mechanical cable connector.

WT 1.21 lbs (0.55 kg)

1542

12" Nickel-plated bronze point with 1/2" x 12" solid copper stem and bronze mechanical cable connector.

WT 1.31 lbs (0.59 kg)

1548

12" Nickel-plated bronze point with 1/2" x 18" solid copper stem and bronze mechanical cable connector.

WT 1.71 lbs (0.77 kg)

1542A


12" Polished aluminum point with 1/2" x 12" solid aluminum stem and mechanical cable connector.

WT 7.3 oz (206.9 g)

1548A

12" Polished aluminum point with 1/2" x 18" solid aluminum stem and mechanical cable connector.

WT 9.3 oz (263.6 g)

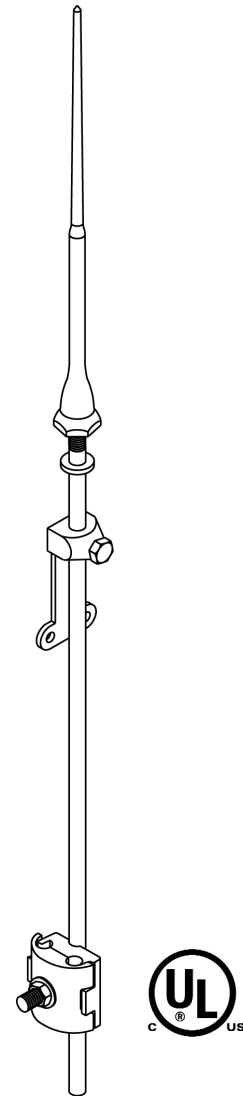

Note: Please call for other sizes to conform to your application needs.